



Renewable  
Strand Woven  
Bamboo  
Flooring



**greenearth**<sup>TM</sup>

*World class flooring*



## Why choose **Green Earth** strand woven bamboo?

- Eco friendly - renewable, recyclable and biodegradable
- Healthy alternative
- Durable - bamboo flooring is composed of complex fibres that do not absorb moisture as easily as wood. Bamboo has the highest hardness rating from any other floor, it will last a lifetime!
- Natural beauty - Green Earth strand woven bamboo flooring boasts a unique appearance that complements all decors. Exotic and elegant, the beauty of Green Earth Bamboo will enhance your interior while remaining true to its natural origins.
- Premium quality - looking beautiful forever.

### **Green Earth** bamboo Technical Specifications

The manufacturers of Green Earth's bamboo flooring is a current holder of CE Certificate ISO9001 in Quality Management, and is a ISO14001 Environmental Management certified company. They also use world leading equipment such as HOMAG and BURKLE. Production is undertaken using European licensed click system, and also a European Treffert coating.



**Sizes:** 1850mm x 125mm x 14mm

**Hardness:** Janka Rating 15

**Finish:** Standard semi-gloss German UV acrylic urethane providing extra anti-scratch and abrasion resistance. Coating is water based, solvent free and exceeds the allowable US and European (E1) standards <math>E1, 0.00155\text{ppm}</math> for off-gassing.

**Moisture Content:** Less than 12%

## Guarantees\*

- Lifetime Structural Warranty
- 25 Year Wear Warranty

\*Warranty subject to terms and conditions. See [www.goldenfield.com.au](http://www.goldenfield.com.au) for details.



Natural



Natural Antique




Carbonised



Carbonised Antique



Autumn

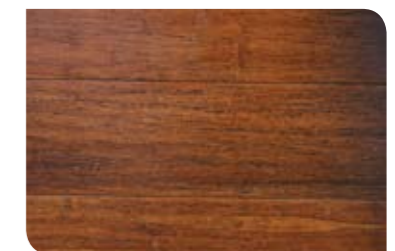

Vintage



Craftwood Brushed Surface



Champagne



Lime Wash

\*\*Colours indicative only and may vary from sample.



# 2G Locking Technology

- Strong and durable locking
- Robust and easy to produce
- Installed without installation tools
- Suitable for all floor panel widths
- Vertical and horizontal locking

The strength of the mechanical locking is divided into two different aspects, visual gap opening at 0,2mm and total strength before the lock is broken or the product slides apart.

The Välinge profile is by far the strongest lock with a strength exceeding twice the strength of a competitive lock. By using the Välinge profile you are among the strongest in the business.



Please see [www.valinge.se](http://www.valinge.se) for further details.



**TREFFERT**  
Industrial Wood Coatings

Member of:



Member  
**NWFA**  
National Wood Flooring Association



**Välinge**  
Click system

For more information, please visit our website:  
[www.goldenfield.com.au](http://www.goldenfield.com.au) or email to  
[info@goldenfield.com.au](mailto:info@goldenfield.com.au) or call 1300 866 800

 **greenearth**™  
*World class flooring*